




Tuba të brinjezuar elastik për transportimin e kabllave të ndryshme elektrike, mbrenda tubit është e vendosur fija plastike e cila për terheqjen e kabllave elektrike, paketimi i tyre është në formë të rrumbullakët (në rrollne) dhe kanë gjatësinë 50m. Montimi i tyre në tokë lejohet deri në 1.5m thellësi dhe duke mbuluar 10mm në rërë. Këta tuba prodhohen me teknologjinë më të re italiane të cilat i përgjigjen standardit En 50086-2-4. Afati i qëndrueshmërisë është 50 vite.

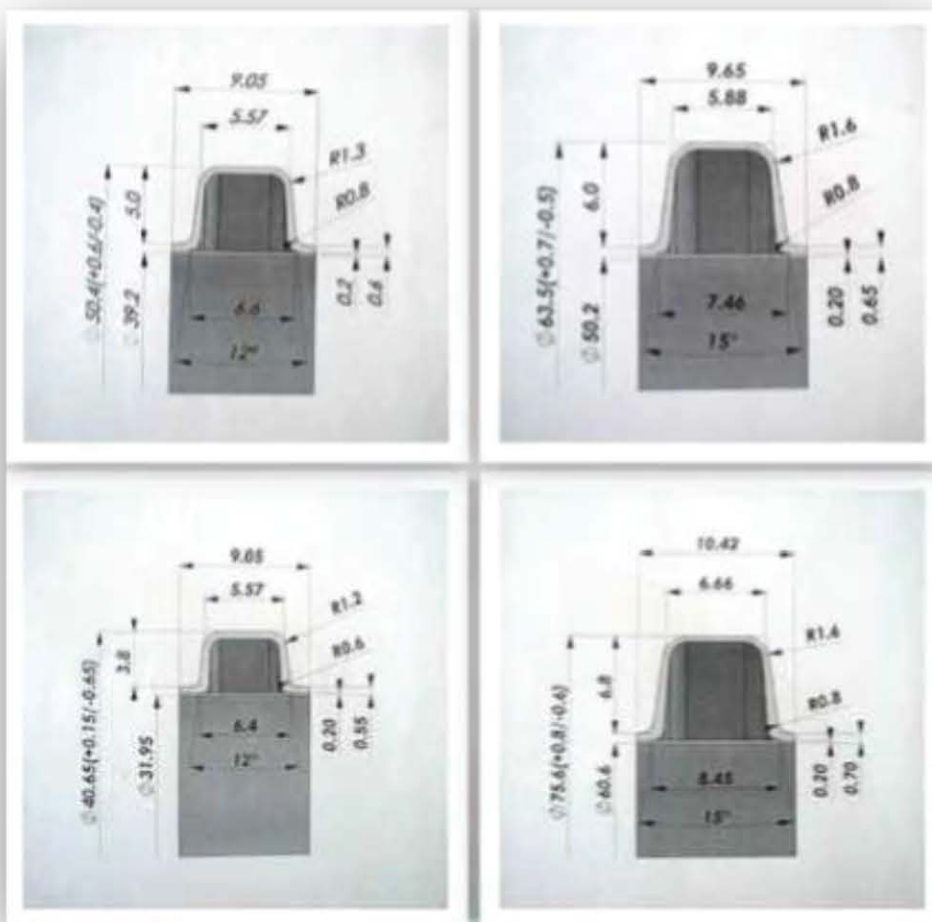

Ribbed elastic pipe for the transportation different electrical cables. Within the pipe is placed the plastic ribbon which serves for the withdraw of the electrical cables. Their packaging is in a round from and has a length of 50m. Their assemblage in the ground is allowed up to 1.5m deep and covered with 10mm grit. These pipes are produced with the new italian technology according the Standard EN 50086-2-4.

	DN{OD}	DN{ID}	Pesha/m Weight	Forca aplikative Force applied	Gjatsia e tubit Pipe length
Ø	40	31.95	113 g/m	450-N	50m
Ø	50	39.20	139 g/m	450-N	50m
Ø	63	50.20	200 g/m	450-N	50m
Ø	75	60.60	256 g/m	450-N	50m
Ø	90	75.00	350 g/m	450-N	50m
Ø	110	94.00	520 g/m	450-N	50m
Ø	125	108.00	650 g/m	450-N	50m
Ø	160	138.00	1000 g/m	450-N	50m

www.ferplast-ks.com



Cypa e brinjëzuar Njështresore

Janë të përbëra nga materiali HDPE dhe përdoren për montime mbrenda mureve për transportim e kabllave elektrike shtëpiake, me gjatësi 50m si standard por me ndonjë kërkesë të veçantë edhe me 100m. Sistemi më i ri është i paraparë me dy shtresa:


1. Shtresa e Jashtme dhe
2. Shtresa e Mbrendshme .

Përparësitë e këtij lloj tubi janë:

-Përparësia e kësaj është, se shtresa e mbrendshme është shtresë silikoni e cila i jep mundësi për rrëshitjen e kabllos shumë më lehtë nëpër tub sesa prodhimet e mëhershme në treg.

-Përparësia tjetër është se dimensionet e mbrendshmeve të rollës është shumë të vogël që jep mundësi të paketimit shumë të lehtë dhe kursen vendin gjatë deponimit dhe transportit të tyre.

-Paketimi është me Foli, në atë formë, që i jep mundësi nga ana e mbrendshme të tërheq tubin, me përdorim aq metra sa nevojitet dhe prapë paketimi mbetet në formën e njëjtë.

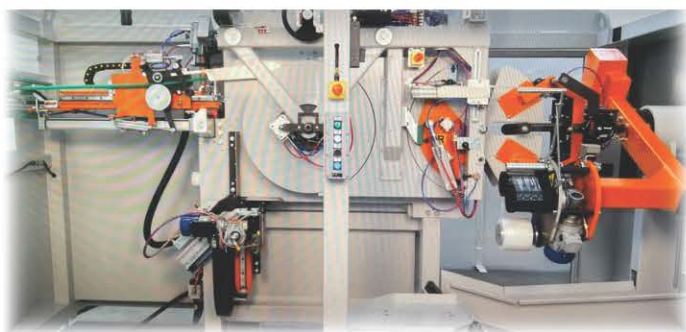

Single Corrugated Pipes

They are made of HDPE material and are used for wall mounting for transporting household electrical cables, with a length of 50m as a standard but with some special requirements also with 100m length.

The newest system is provided with two layers:

1. Outer Layer and
2. Inner layer

The advantages of this type of pipe are:

- The advantage of this is that, the inner layer is a silicone layer which allows the cable to slide much easier through the pipe than previous products on the market.
- The other advantage is that, the inner dimension of the roll is very small which allows very easy packaging and saves space during storage and transportation.
- The packaging is with Foil, in that form, which allows the inside to pull the tube, use as many meters as needed and again the packaging remains in the same shape.



	DN{OD}	DN{ID}	Pesha/m Weight	Forca aplikative Force applied	Gjatesia Length
Ø	16	11.1	46 gr/m	750-N	50-100 m
Ø	20	13.9	56 gr/m	750-N	50-100 m
Ø	22	15.8	68 gr/m	750-N	50-100 m
Ø	25	18.2	80 gr/m	750-N	50-100 m
Ø	32	24	115 gr/m	750-N	50-100 m